

Project	Type	Notes
---------	------	-------

MHT LIGHTING

LINE VOLTAGE FIXTURE

MHTL-BL LED BARN LIGHT SERIES

FEATURES

- Fixture Protection Class IP65
- Available Photocell Control
- High Performance Reflector
- Standard 4kV Surge Protection

GENERAL INFORMATION

Applications	Backyards / Perimeter Lighting / Security Lighting / Service Roads
Warranty	10-Year Limited Warranty
Construction	Die Cast Aluminum Housing (Brown) Clear Prismatic Polycarbonate Diffuser

Certifications






PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	347V/480V
Power Factor	> 0.95 @277V
Mounting	Multiple Mounting Options
Lumens	7,700 Lumens
Max Input Power	70W
CRI	> 80
CCT	4000K/5000K
L70	> 100,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 15% @277V



DIMENSIONS

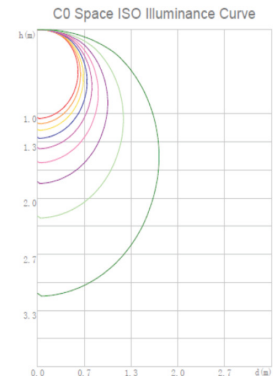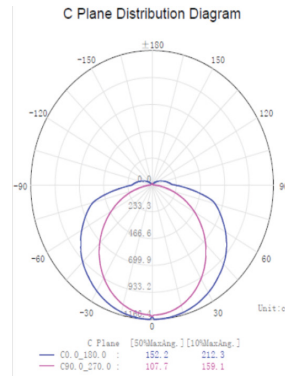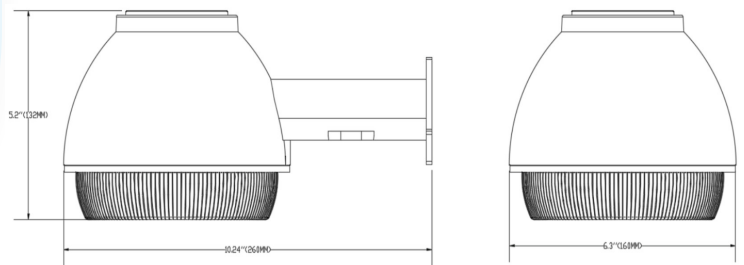

FIXTURE PERFORMANCE

Model	Input Power	CCT	Lm/W	Lumens	EPA at 0° (ft²)
MHTL-BL-40E-5K-U	40W	5000K	110	4,400	0.6
MHTL-BL-70E-5K-U	70W	5000K	110	7,700	0.6

ORDERING INFO: Sample Code - MHTL-BL-40E-4K-U-

Series	Wattage	Color Temperatures	Input Voltage	Options
MHTL-BL	E		U	
MHTL-BL	40=40W 70=70W	4K=4000K 5K=5000K	U=120-277V	(Blank) - Standard in Brown PC=Photocell Control

