

Project	Type	Notes
---------	------	-------

# MHT LIGHTING

## LINE VOLTAGE FIXTURE



## MHTL-RCL-SEN

### Sensor Integrated CANOPY SERIES

#### FEATURES

- Die-casted Aluminum Housing
- Low Glare and Durable Polycarbonate Lens
- Over 135 Degree Light Spread
- Removable Surface Mount Bracket -Fast Installation
- Lightweight and Compact Size
- Multiple Coin Plugs to Access Power In and Out
- Integrated Occupancy Sensor available (Sold Separately)



#### GENERAL INFORMATION

Applications	Canopy / Gas Station / Parking Garage / Walkway
Warranty	10-Year Limited Warranty
Construction	Die Cast Aluminum Housing (White Standard) Polycarbonate Lens - Impact Resistant
Certifications	

#### PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	347V/480V
Power Factor	> 0.92@277V
Mounting	Surface Mount OR 3/4" Pendant
Lumens	10,100 Lumens
Max Input Power	75W
CRI	> 70
CCT	4000K/5000K
L70 Lifetime	> 50,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 20% @277V

#### DIMENSIONS

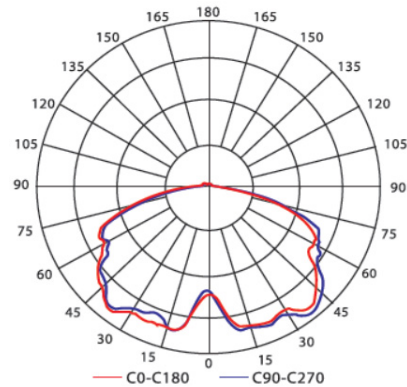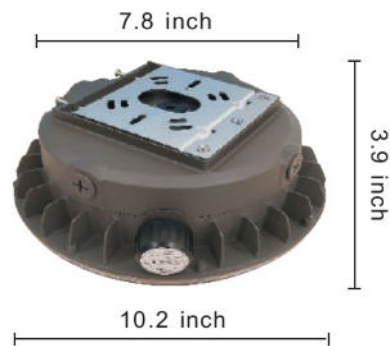

#### FIXTURE PERFORMANCE

Model	Input Power	CCT	Lm/W	Lumens	Dimensions
MHTL-RCL-SEN-40E-5K-U	40W	5000K	135	5,400	7.8 x 10.2 x 3.9
MHTL-RCL-SEN-60E-5K-U	60W	5000K	135	8,100	7.8 x 10.2 x 3.9
MHTL-RCL-SEN-75E-5K-U	75W	5000K	135	10,100	7.8 x 10.2 x 3.9

#### ORDERING INFO: Sample Code - MHTL-RCL-SEN-40-4K-U-PM



Series	Wattage	Color Temperatures	Input Voltage	Mountings	Options
MHTL-RCL-SEN					
MHTL-RCL-SEN	40 60 75	4K=4000K 5K=5000K	U=120-277V	PM=Pendant Mount SM=Surface Mount	BRZ - Dark Bronze Housing (Standard in White) EM - Emergency Battery Backup OS - Occupancy Sensor - Dimming SPD - Surge Protective Device