

Project	Type	Notes

MHT LIGHTING

PoE FIXTURE

Line Voltage Fixture



STRIP Series

LED WRAPAROUND Series

FEATURES

- PoE Enabled that works with Inspextor
- 0-10V Line Voltage Available
- Multiple mounting options

GENERAL INFORMATION

Applications	Corporate Campuses, Data Centers, Education, Retail, and Healthcare Facilities
Warranty	10-Year Limited Warranty
Construction	Steel Construction Housing with Highly Reflective White Coating Lens: Clear Prismatic Polycarbonate

Certifications




PRODUCT DATA


Electrical	Remote PoE Low Voltage Driver Node or Intergrated 0-10V LED Driver
Mounting	Suspended Cable Mount / Ceiling/Wall Surface Mount
Lumens	3,780-12,150 Lumens
Max Input Power	PoE:28W/48W Line Voltage: 90W
CRI	> 80
CCT	3000K/3500K/4000K/5000K
L70 Lifetime	> 50,000 Hours
Rated Lifespan	> 100,000 Hours
Dimensions	4FT: 48" x 3.35" x 3.58" 8FT: 98.7" x 3.35" x 3.58"

DIMENSIONS

Unit: mm

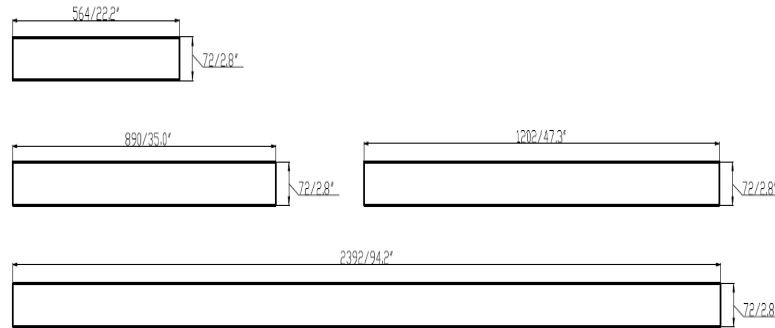

PHOTOMETRICS

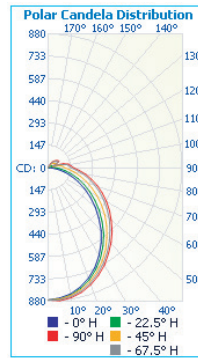

Center Beam fc	Beam Width	
1.5ft	385 fc	3.4 ft 5.4 ft
3.0ft	96.3 fc	6.7 ft 10.8 ft
4.5ft	42.8 fc	10.1 ft 16.2 ft
6.0ft	24.1 fc	13.4 ft 21.6 ft
7.5ft	15.4 fc	16.8 ft 27.0 ft
9.0ft	10.7 fc	20.1 ft 32.4 ft

■ Vert. Spread: 96.4°
■ Horiz. Spread: 121.9°

FIXTURE PERFORMANCE

Model	Max Wattage	Lumens/Watt
MHT-STRP-4FT	28/40/48W	135 lm/W
MHT-STRP-8FT	90W	135 lm/W

ORDERING INFO: Sample Code - MHTI-STRP-ECO-SC-4FT-28E-4K-SM

Series	Size & Wattage	Color Temperatures	Mountings	Options
MHT-STRP				
PoE:MHTI-STRP-SC LV:MHTL-STRP	4FT-28W/48W/40W (PoE/PoE/ LV) 8FT-70W/90W (LV)	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K AT - Tunable 2700K to 5700K	AC - Suspended Cable Mount SM - Ceiling/Wall Surface Mount	(Blank) - Standard in White SPD - 10kV Surge Protective Device

