

Project	Type	Notes

MHT LIGHTING

PoE FIXTURE

Line Voltage Fixture







WRP Series LED WRAPAROUND Series

FEATURES

- PoE Enabled that works with Inspextor
- 0-10V Line Voltage Available
- Multiple mounting options


GENERAL INFORMATION

Applications	Corporate Campuses, Data Centers, Education, Retail, and Healthcare Facilities
Warranty	10-Year Limited Warranty
Construction	Die-form Steel Housing (White) - Frosted Finish Acrylic Lens Highly - Reflective White Coating
Certifications	   


PRODUCT DATA

Electrical	Remote PoE Low Voltage Driver Node or 0-10V LED Driver
Mounting	Suspended Cable (Standard 3FT) / Ceiling/Wall Surface Mount
Lumens	3,000-5,200 Lumens
Max Input Power	PoE: 48W Line Voltage : 48W
CRI	> 80
CCT	3000K/3500K/4000K/5000K
L70 Lifetime	> 50,000 Hours
Rated Lifespan	> 100,000 Hours
Dimensions	2FT: 24.4" x 5.3" x 3.7" 4FT: 47.6" x 5.3" x 3.7"

DIMENSIONS

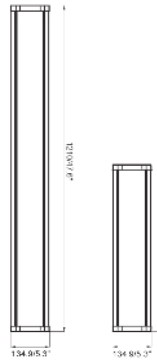

PHOTOMETRICS

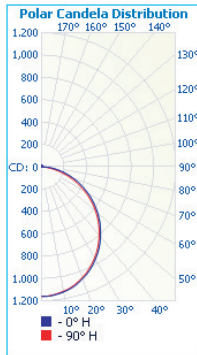

Center Beam fc	Beam Width	
1.5ft	517 fc	4.1 ft 4.1 ft
3.0ft	129 fc	8.2 ft 8.3 ft
4.5ft	57.5 fc	12.3 ft 12.4 ft
6.0ft	32.3 fc	16.4 ft 16.5 ft
7.5ft	20.7 fc	20.5 ft 20.7 ft
9.0ft	14.4 fc	24.5 ft 24.8 ft

■ Vert. Spread: 107.5°
■ Horiz. Spread: 108.1°

FIXTURE PERFORMANCE

Model	Max Wattage	Lumens/Watt
MHT-WRP-2FT-20W	20W	130 lm/W
MHT-WRP-4FT-28W/40W	48W	130 lm/W

ORDERING INFO: Sample Code - MHTI-WRP-SC-4FT-28E-4K-SM



Series	Size & Wattage	Color Temperatures	Mountings	Options
MHT-WRP				
PoE: MHTI-WRP-SC LV: MHTL-WRP	2FT-20W (LV/PoE) 4FT - 28W/48/40 (PoE/PoE/LV)	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K AT - Tunable 2700K to 5700K	AC - Suspended Cable (Standard 3FT) SM - Ceiling/Wall Surface Mount	(Blank) - Standard in White