

Project	Type	Notes
---------	------	-------

# MHT LIGHTING

PoE FIXTURE

Line Voltage Fixture



## VNT Series

LED WALL VANITY Series

### FEATURES

- PoE Enabled that works with Inspextor
- 0-10V Line Voltage Available
- LED Wall Mounted Vanity LED Fixture


### GENERAL INFORMATION

Applications	Coporate Campuses, Education, Retail, and Healthcare Facilities
Warranty	5-year Limited Warranty
Construction	Extruded Aluminum Construction Mounted on a Chrome Finished Steel Back Box with a Universal Junction Box Mounting Plate Lens: Clear and White Acrylic
Certifications	  


### PRODUCT DATA

Electrical	Integrated PoE Low Voltage Driver Node or 0-10V LED Driver .
Mounting	Wall mounted
Lumens	2,000 Lumens
Max Input Power	20W
CRI	> 85
CCT	2700K/3000K/3500K/4000K
L70 Lifetime	> 50,000 Hours
Rated Lifespan	> 50,000 Hours
Dimensions	Chrome Box: 6.8" x 4.25" x 1.45" Overall: 24" x 4.25" x 3"

### DIMENSIONS

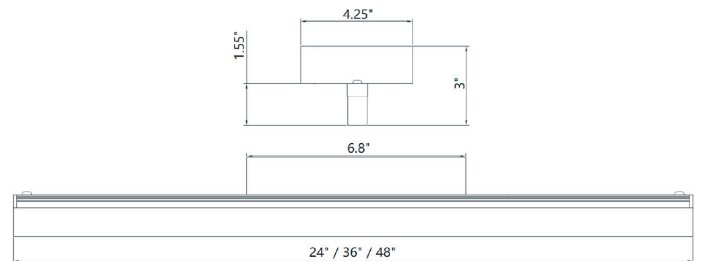

### PHOTOMETRICS



	Center Beam fc	Beam Width
1.5ft	84.4 fc	5.2 ft
3.0ft	21.1 fc	10.4 ft
4.5ft	9.38 fc	15.6 ft
6.0ft	5.27 fc	20.7 ft
7.5ft	3.38 fc	25.9 ft
9.0ft	2.34 fc	31.1 ft

■ Horiz. Spread: 119.9°

### FIXTURE PERFORMANCE

Model	Max Wattage	Lumens/Watt
MHT-VNT-24-20W	20W	100 lm/W

ORDERING INFO: Sample Code - MHTi-VNT-SC-24-20E-27K



Series	Size & Wattage	Color Temperatures	Options
MHT-VNT			
PoE: MHTi-VNT-SC LV: MHTL-VNT	24-20W (PoE/LV)	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K	(Blank) - Standard in Chrome